

## Control oil supply

Model 3DRE...-.../...XY Pilot oil external supply  
Pilot oil external drain


In this version, the pilot oil is supplied from a separate control circuit (external).  
The pilot oil drain is not directed to the port T of the main valve, but return to the tank via port Y (external).

Model 3DRE...-.../...Y... Pilot oil external supply  
Pilot oil external drain

In this version, the pilot oil is supplied from port P of the main valve (internal).  
The pilot oil drain is not directed to the port T of the main valve, but return to the tank via port Y (external).  
Port X in the subplate must be closed.

04


Size 10:

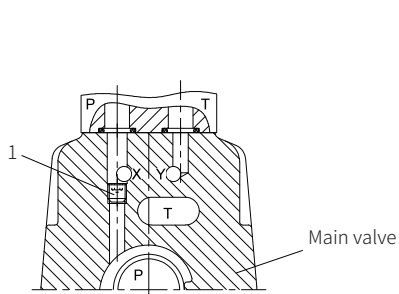

Pilot oil supply external: 1 Closed  
internal: 1 Open

Pilot oil drain external

Size 16:

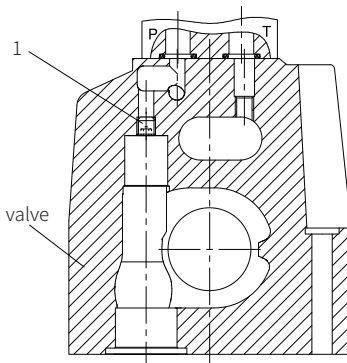

Pilot oil supply external: 1 Closed  
internal: 1 Open

Pilot oil drain external

## 2-Way Proportional Flow Control Valve

Model: 2FRE6...2XJ



- ◆ Size 6
- ◆ Maximum working pressure 210bar
- ◆ Maximum working flow 25 L/min

### Contents

Function description, sectional drawing	02
Models and specifications	03
Functional symbols	03
Technical parameters	04-05
Characteristic curve	06-07
Component size	08

### Features

- With pressure compensation for the pressure compensated control a flow
- Operation by proportional solenoid
- With electrical position feedback of control throttle
- The position transducer coil is axially adjusted to make the zero position adjustment of the throttle port easy (electrical, hydraulic)
- Flow control in both directions via rectifier sandwich plate

**Function description, sectional drawing**

The 2FRE...proportional flow control valves have a 2-way function. They can control a corresponding flow independent of pressure and temperature according to the provided electrical command value. The valve basically consists of valve body (1), proportional solenoid with inductive position transducer (2), measurement orifice (3), pressure compensator (4), and optional check valve (6).


Proportional flow control valve model 2FRE6B-2XJ/ (without external closing, with check valve)

The setting of the flow (0 to 100%) is determined by the command value potentiometer. The applied command value adjusts the measurement orifice (3) via the amplifier and proportional solenoid. The position of the measurement orifice (3) is measured by the inductive position transducer.

Any deviation from the command value is compensated through feedback control. The pressure compensator (4) keeps the pressure drop at the measurement orifice (3) at a constant value at all times. Therefore, the flow is load compensated. The low temperature drift is achieved due to the design of the measurement orifice.

With a command value of 0%, the measurement orifice is closed. In the case of a power failure or a cable break at the inductive position transducer, the measurement orifice closes. When the command value is 0%, it is possible a start-up without overshoot. The opening and closing of the measurement orifice can delay via two ramps in the proportional amplifier. Via the check valve (5) a free flow from B to A is possible.

By installing a rectifier sandwich plate Z4S6... under the proportional flow control valve, the flow from the actuator can be controlled in both directions.

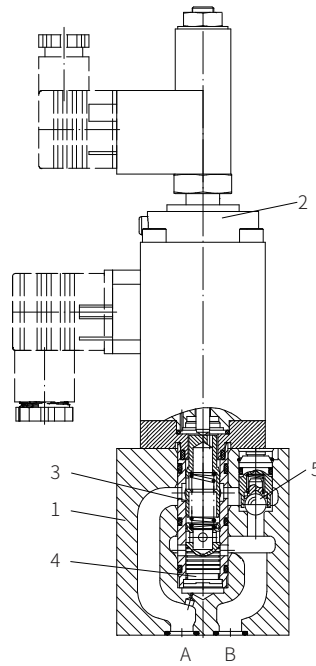


Model 2FRE6B-2XJ/

Proportional flow control valve model 2FRE6A-2XJ/ (with external closing, without check valve)

In principle, the function of this valve is similar with the valve 2FRE6B-2XJ/K4RV.

To suppress the start-up jump when the measurement orifice (3) (command value > 0%) is open, a closing of the pressure compensator (4) is provided via port P (6). The internal connection between port A and the pressure compensator (4) is blocked. Via the external port P (6), the pressure in port P of the directional valve (8) acts on the pressure compensator (4) and keeps it in its closed position against the spring force (7).


If the directional valve (8) is switched from P to B, the pressure compensator (4) moves from the closed position to the corresponding compensation position, thus start-up jump is avoided.

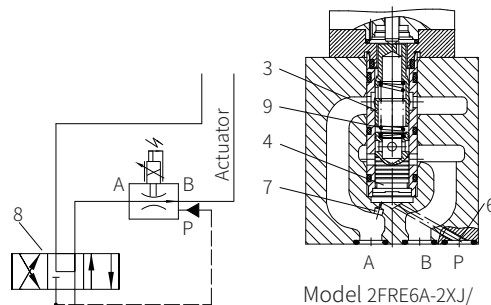


Model 2FRE6A-2XJ/

**Models and specifications**

Proportional flow control valve

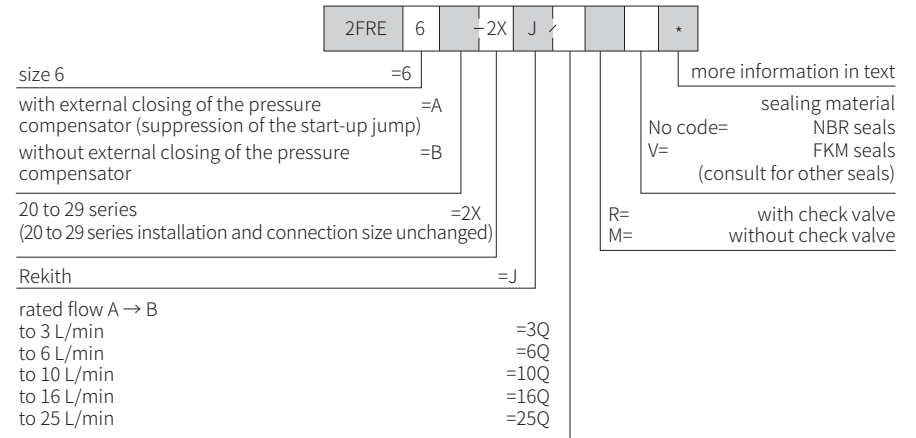


Rectifier sandwich plate

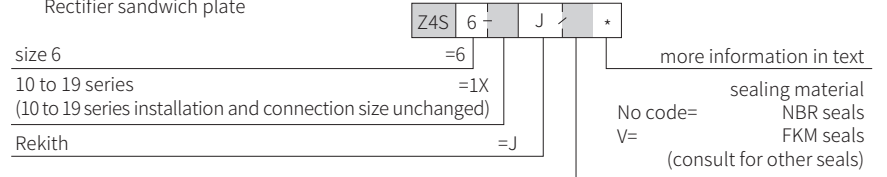


**Functional symbols**

Proportional flow control valve (simplified, detailed)

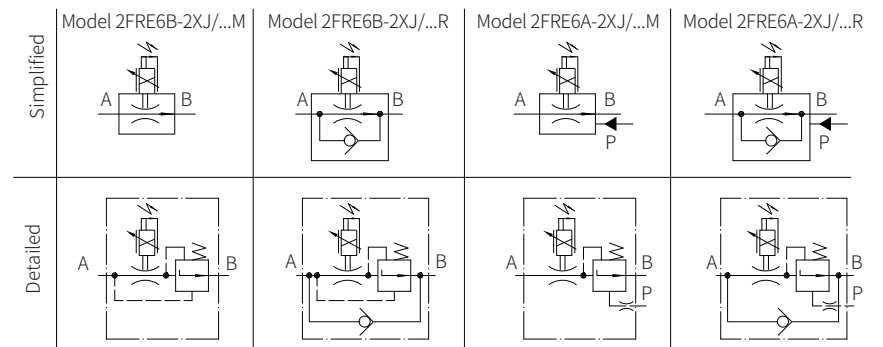

Rectifier sandwich plate (①= Valve side, ②= Subplate side)



## Technical Parameters

Overview							
Installation position		Optional					
Storage temperature range	°C	-20 to +80					
Environment temperature range	°C	-20 to +50					
Weight	Proportional flow control valve	Kg	1.8				
	Rectifier sandwich plate	Kg	0.9				
Hydraulic (Measured when using HLP46, $\vartheta_{oil} = 40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ )							
Maximum working pressure	Port A	bar	to 210				
Flow	type		3Q	6Q	10Q	16Q	25Q
	$q_{v\max}$	L/min	3	6	10	16	25
	$q_{\max}$ to 100 bar	cm <sup>3</sup> /min	15	25	50	70	100
	to 210 bar	cm <sup>3</sup> /min	25	25	50	70	100
Maximum leakage of flow when $\Delta p A \rightarrow B$ with command value 0%	50 bar	cm <sup>3</sup> /min	4	4	6	7	10
	100 bar	cm <sup>3</sup> /min	5	5	8	10	15
	210 bar	cm <sup>3</sup> /min	7	7	12	15	22
Minimum pressure differential		bar	6 to 10				
Pressure differential with free return flow B $\rightarrow$ A	See characteristic curve						
Pressure and flow of: input/output pressure	See characteristic curve						
Temperature dependence	See characteristic curve						
Temperature drift, hydraulic and electric	See characteristic curve						
Fluid	Mineral oil (HL, HLP) <sup>1)</sup> in accordance with DIN 51524; Fast living organisms degraded oil according to VDMA 24568; HETG (Rapeseed oil) <sup>1)</sup> ; HEPG (Polyethyleneglycol) <sup>2)</sup> ; HEES (Synthetic Fats) <sup>2)</sup>						
Cleanliness of oil <sup>3)</sup>	The maximum allowable pollution level of oil is ISO 4406 (C): 20/18/15						
Oil temperature range	°C	20 to +80					
Viscosity range	mm <sup>2</sup> /s	15 to 380					
Hysteresis	%	< $\pm 1$ of $q_{v\max}$					
Repetition accuracy	%	< 1 of $q_{v\max}$					
Manufacturing tolerance model 2FRE6...	$\leq \pm 3\%$ with command value 33%						
	$\leq \pm 5\%$ with command value 100%						
RT-MRPD1-150-30-CN-A1/F1	%	< 1					
Hydraulic – Rectifier sandwich plate							
Working pressure	bar	to 210					
Cracking pressure	bar	0.7					
Nominal flow rate	L/min	25					

1) For NBR seal and FKM seal.

2) Only for FKM seal.

3) The oil must meet the cleanliness degree requested by the components in the hydraulic system. Effective oil filtration can prevent failure and increase the service life of the components.


## Technical Parameters

Electrical (proportional solenoid)			
Protection to DIN 40050		IP65 <sup>2)</sup>	
Voltage type		DC	
Coil resistance	Cold value at 20°C	Ω	5.4
	Maximum warm value	Ω	8.2
Duty cycle		continuous	
Maximum current per solenoid	A	1.5	
Electrical connections		Plate connector	
		Connecting plug	
Electrical (Inductive position transducer)			
Protection to DIN 40050		IP65	
Coil resistance (total resistance of the coils between... ) at 20°C	Ω	1 and 2	2 and $\frac{1}{2}$
		31.5	45.5
Electrical connections		plate connector GSA	
		Connecting plug GM209N	
Inductivity	mH	6 to 8	
Oscillator frequency	KHz	2.5	
Electrical position measurement system		Different throttle valves	
Nominal stroke	mm	3.5	

**Characteristic curve**

(Measured when using HLP46,  $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ )


Command value voltage in relation to the flow  
(Flow control of A → B);  $p_{nom} = 50\text{bar}$

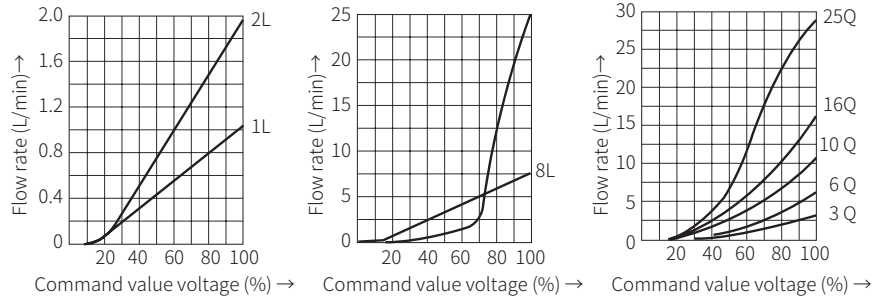


04

**Dynamic response**

Transition function with stepped command value modification;  $p_{nom} = 100\text{bar}$ ; type "25Q"

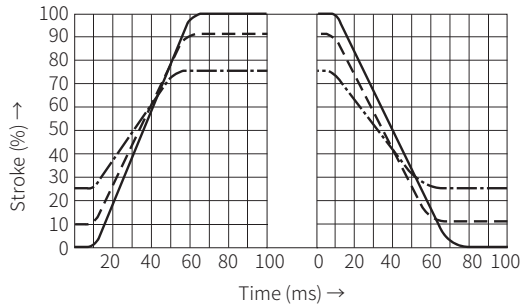


Frequency response characteristic curves;  $p_{nom} = 100\text{bar}$ ; type "25Q"

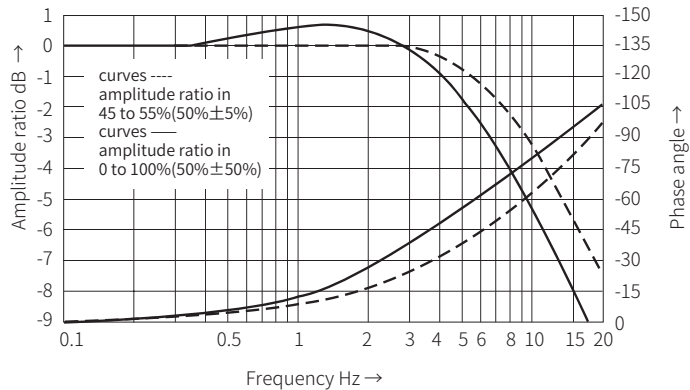

**Characteristic curve**


(Measured when using HLP46,  $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ )

Proportional flow control valve  
Pressure in relation to the flow rate

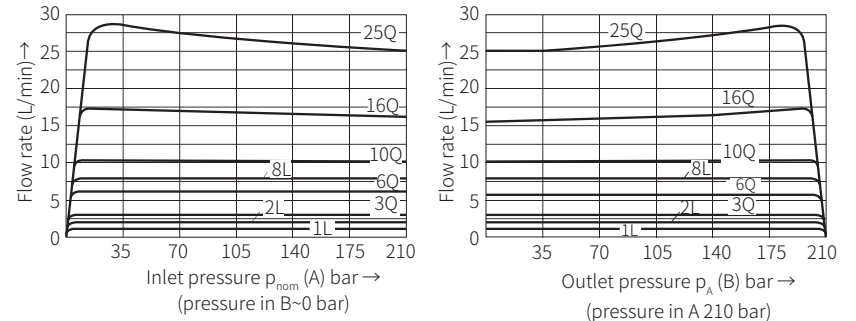


04


Temperature in relation to the flow rate  
at  $\Delta p = 30\text{bar}$

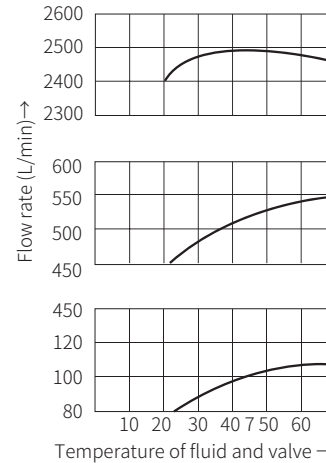

Pressure differential via check valve B → A  
Throttle valve closed

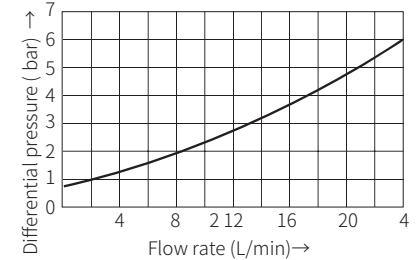


Rectifier sandwich plate  
 $\Delta p_{qv}$  characteristic curve

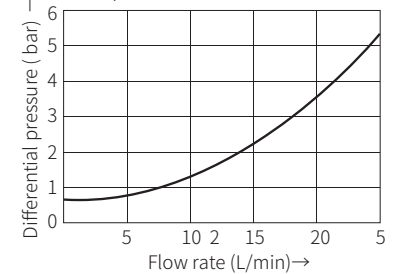


## Component size

Size unit: mm



- 1 Valve body
- 2 Proportional solenoid with inductive position transducer
- 3 Connecting plug
- 4 Space required to remove the plug
- 5 Hole for model 2FRE6A...
- 6 O-ring 9.25x1.78
- 7 Port A
- 8 Port B
- 9 Blind hole
- 10 Name plate




Rectifier sandwich plate Z4S6-1XJ/...

- 1 Flow control valve
- 2 Rectifier sandwich plate
- 3 Name plate
- 4 O-ring 9.25x1.78 (for port A, B)

Note:

Rectifier sandwich plate Z4S6-1XJ/ cannot be connected with the flow control valve 2FRM6A...3XJ/ with external connection of the pressure compensator.

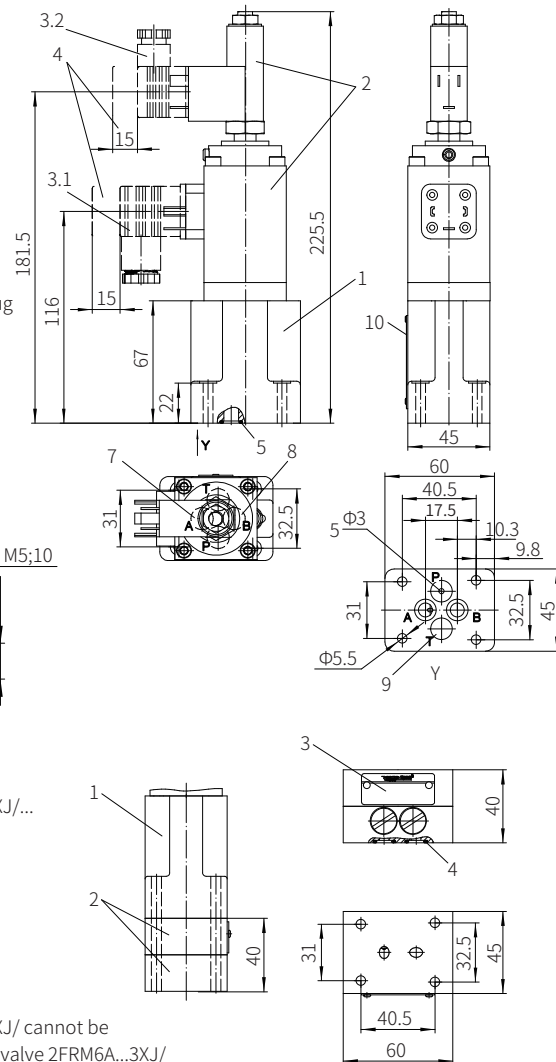

## 2-Way Proportional Flow Control Valve

Model: 2FRE...4XJ



- ◆ Size 10, 16
- ◆ Maximum working pressure 315bar
- ◆ Maximum working flow 160 L/min

## Contents

Function description, sectional drawing	02
Models and specifications	03
Functional symbols	03
Technical parameters	04-05
Characteristic curve	06-08
Component size	09

## Features

- With pressure compensation for the pressure compensated control a flow
- Operation by proportional solenoid
- With electrical position feedback of control throttler
- The position transducer coil is axially adjusted to make the zero position adjustment of the throttle port easy (electrical, hydraulic) without the need to adjust the electronics
- Minimum sample variation of valve 2FRE and proportional amplifiers