

## Hydraulic Control Directional Valve

Model: WHD10...3XJ



- ◆ Size 10
- ◆ Maximum working pressure 315 bar
- ◆ Maximum working flow 120 L/min

### Contents

Function description, sectional drawing	02
Models and specifications	02
Functional symbols	03
Technical parameters	04
Characteristic curve	04
Characteristic limit	05
Component size	06

### Features

- Direct operated directional spool valve
- Type of actuation:  
Hydraulic (WHD)
- Subplate mounting
- Porting pattern to DIN 2430 Form A,  
and ISO4401

Any part of this brochure can not be reproduced, edited, copied and disseminated electronically in any way without authorization of Jiayite Hydraulics company. As the product is in constant development and innovation, the information in this brochure is not specific to the special conditions or applicability of a specific industry, thus Jiayite Hydraulics company is not responsible for any incomplete or inaccurate description generated.



### Function description, sectional drawing


The WHD valve is directional spool valve with fluid logic actuation, it controls the opening, closing and direction of the flow.

The valve is composed of valve body (1), main spool (2), one or two reset spring (3), and one or two position (4).

#### Model WHD...

In the initial state, the main spool (2) remains in the middle position under the action of two reset springs (3). If external signal oil enters through port A, the oil pushes the left position (4) to the right, thus driving the main spool (2) to the right. Removing the control oil, the main spool (2) returns to the middle position under the right spring force.

If external signal oil enters through port B, the oil pushes the right position (4) to the left, thus driving the main spool (2) to the left. Removing the control oil, the main spool (2) returns to the middle position under the left spring force.

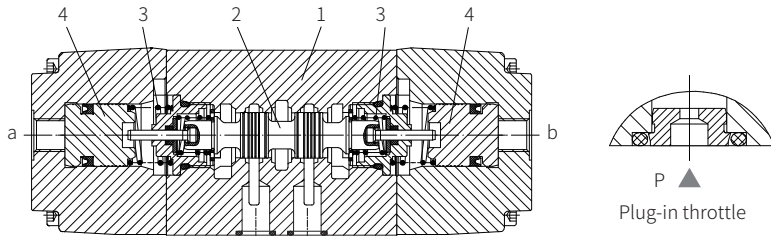

#### Model WHD.../O (Only for symbols A, C, D)

This model is a hydraulic operated direction valve. If using actuation elements without reset springs and without detent, there is no defined spool position in initial condition.


#### Model WHD.../OF (Only for symbols A, C, D)

This model is a hydraulic operated direction valve. When actuation elements with detent, the spool position can be locked.

#### Plug-in throttle


Due to the limitation of the working conditions, the flow may exceed the value of the performance curve during switching process, so it is necessary to install a plug-in throttle into channel P.

### Functional symbols

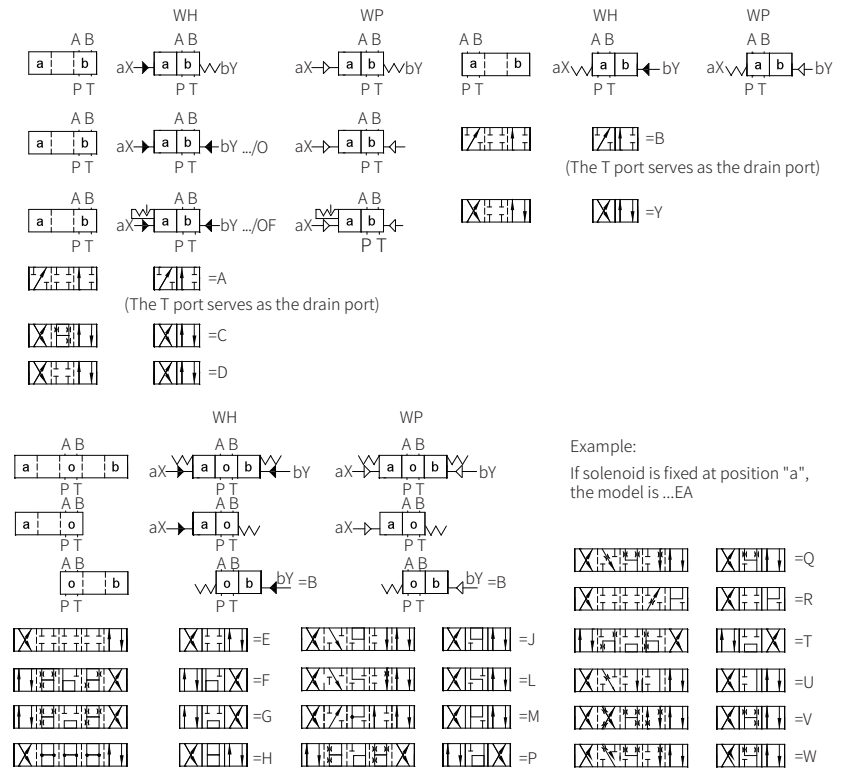

Example:  
If solenoid is fixed at position "a", the model is ...EA

### Models and specifications

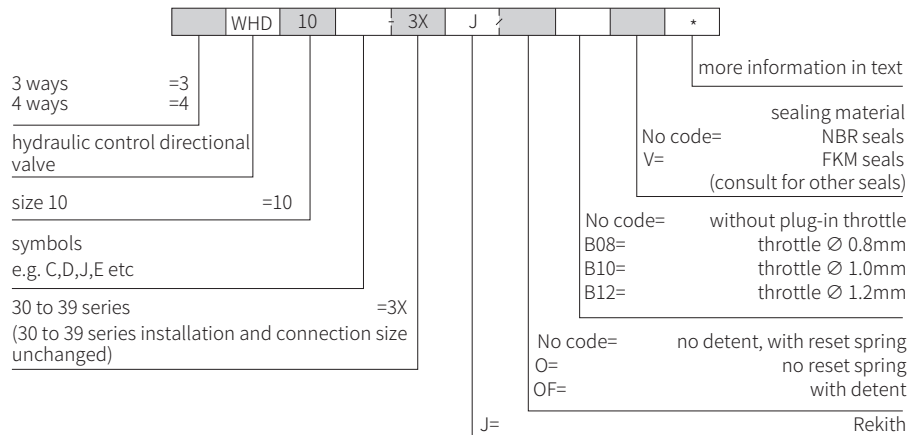


**Technical parameters**

Valve type		WHD	
Weight	1 operating cylinder	kg	3.0
	2 operating cylinder	kg	3.3
Oil temperature range		°C	
		-30 to +80 (NBR seal)	
		-20 to +80 (FKM seal)	
Max. working pressure	oil port A, B, P	bar	315
	oil port T	bar	160
Max. flow		L/min	120
Effective over-flow section (neutral position)	Type V	mm <sup>2</sup>	11(A/B→T); 10.3(P→A/B)
	Type W	mm <sup>2</sup>	2.5(A/B→T)
	Type Q	mm <sup>2</sup>	5.5(A/B→T)
Control pressure		bar	50-160
Working medium		Mineral oil, Phosphate ester	
Viscosity range		mm <sup>2</sup> /s	2.8 to 500
Cleanliness of oil		The maximum allowable pollution level of oil is ISO4406 Class 20/18/15	

**Characteristic curve**

(Measured when using HLP46,  $\vartheta_{oil}=40^{\circ}C \pm 5^{\circ}C$ )

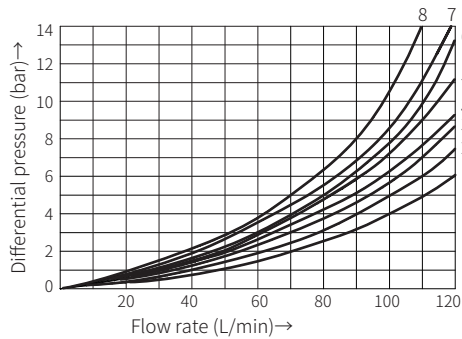


8 Symbols "G" and "T" in neutral position P→T  
8 Symbol "R" in switching position A→B

Function symbol	Flow direction			
	P to A	P to B	A to T	B to T
A	4	3	-	-
B	3	4	-	-
C	3	3	4	4
D	3	3	5	5
E	2	2	4	4
F	1	2	3	4
G,T	4	4	7	7
H	1	1	5	5
J	2	2	3	3
L	3	3	2	4
M	1	1	4	4
P	3	1	5	5
Q	2	2	2	2
R	3	4	3	-
U	3	3	5	2
V	2	2	3	3
W	3	3	3	3
Y	4	4	6	6

**Characteristic limit**

Because of adhesive effect, the switching function of the valves depends on the filtration. In order to achieve the specified admissible flow values, we suggest full flow filtration with 25um. The flow force acting within the valves also affect the flow performance. With 4 way valves the specified flow data thus apply to normal operation with 2 volume flow directions(e.g. from P to A and at the same time return flow from B to T)

If only one flow direction is available, when 4-way valve is used as a 3-way valve by blocking port A or B, the flow can be significantly smaller in critical cases.

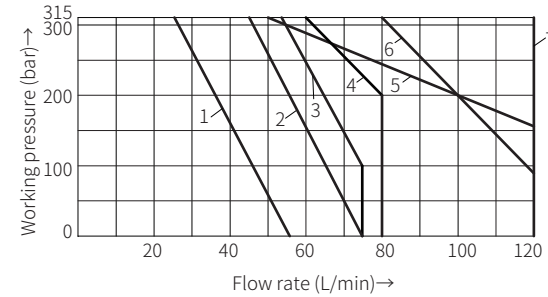


Curve	Function symbol
1	A, B
2	A/O
3	H
4	F, G, P, R, T
5	J, L, Q, U, W
6	C, D, E, M, V, Y
7	C/O, C/OF D/O, D/OF

## Component size

Size unit: mm

Model WHD10...3XJ/...

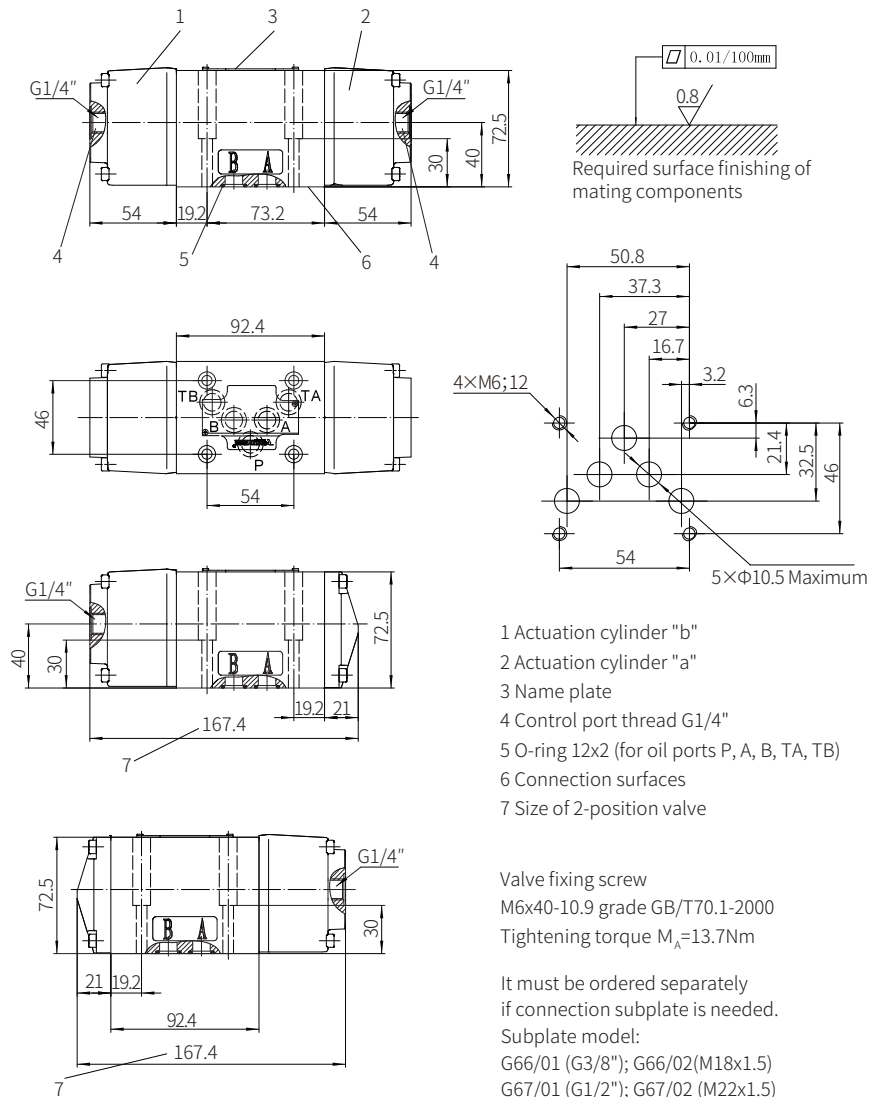

0178

## Solenoid Operated Poppet Valve

Model: M-SEW6...3XJ



- ◆ Size 6
- ◆ Maximum working pressure 420/630 bar
- ◆ Maximum working flow 25 L/min

## Contents

Function description, sectional drawing	02-03
Models and specifications	04
Technical Parameters	05
Characteristic curve	06
Characteristic limit	07
Component size	08-09
Application examples	10

## Features

- Direct operated solenoid directional poppet valve
- Closed port without leakage
- Switching smoothly even in high-pressure state long periods

0179